



Vertical Low Loss Headers – Dimensions and Fittings Detail

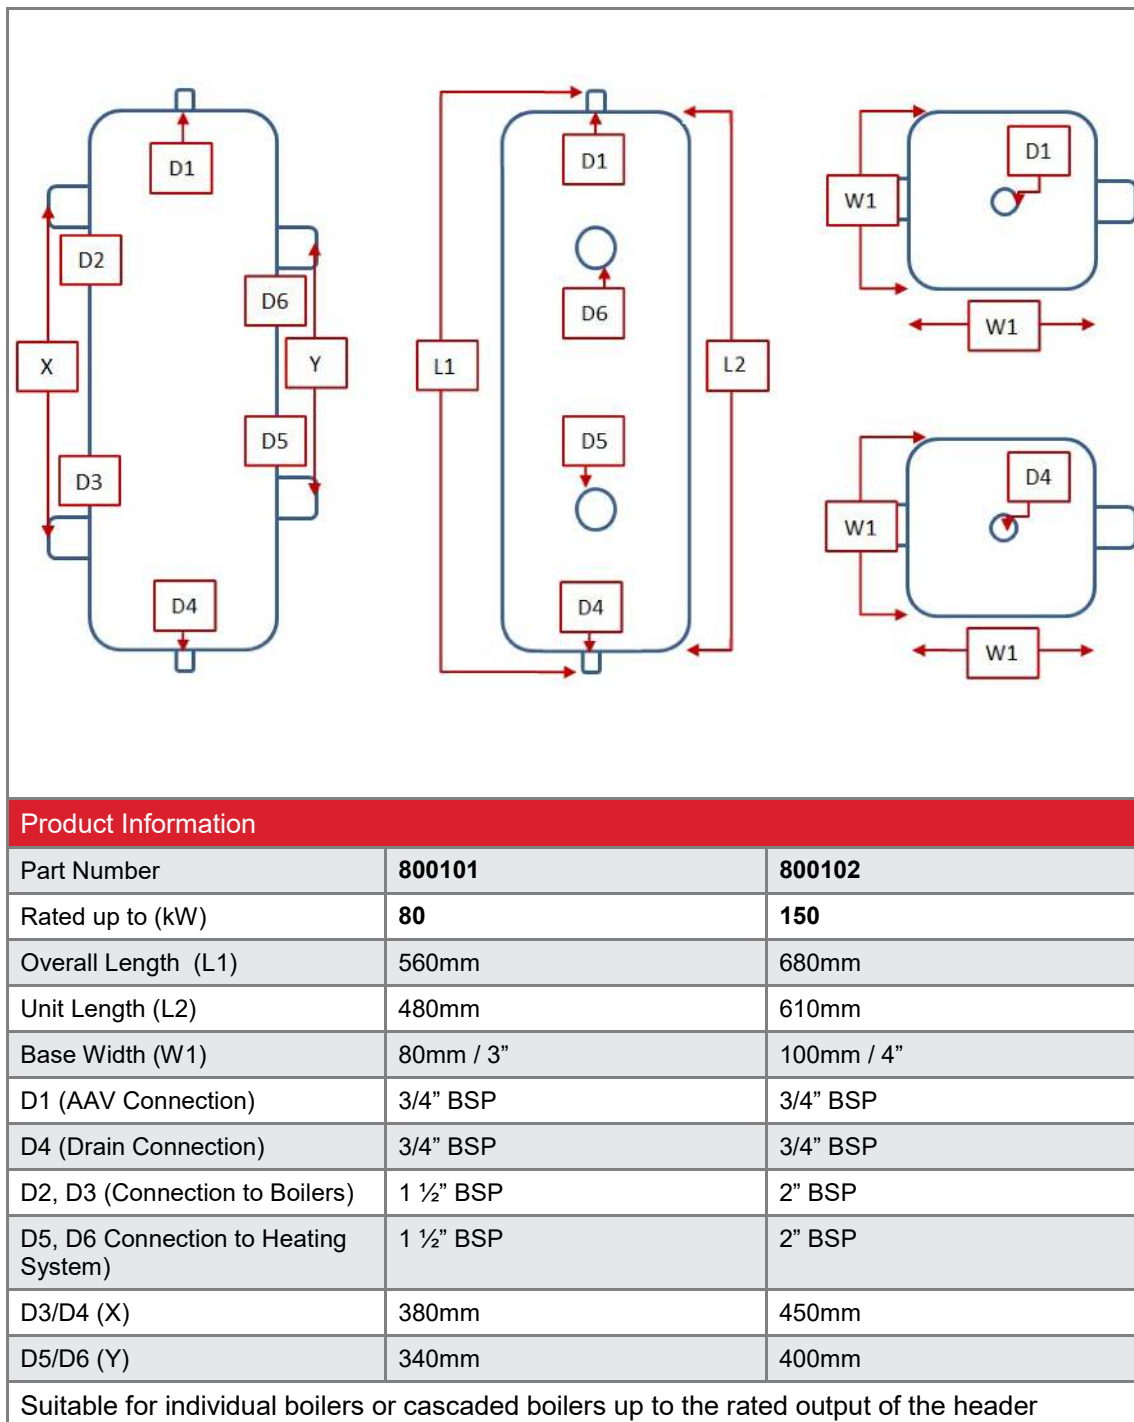

*** Based on a 20c dT

Vertical Low Loss Headers – Dimensions and Fittings Detail

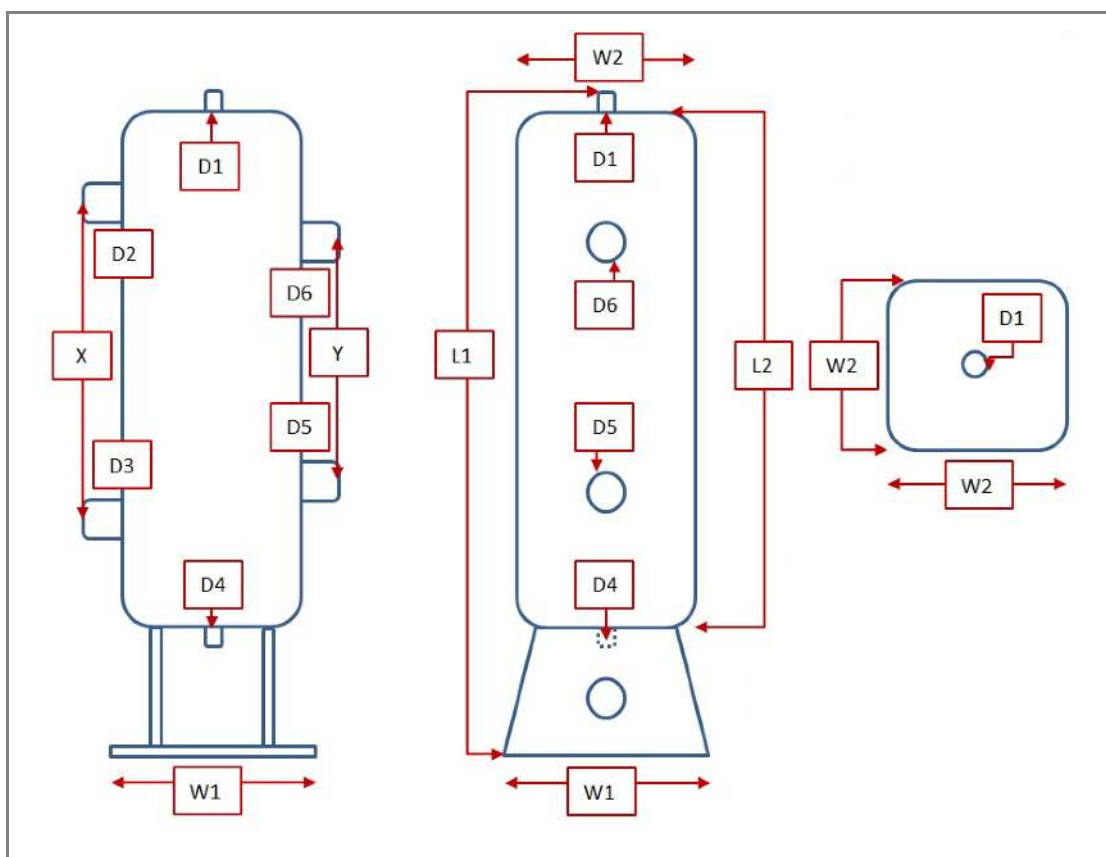

Product Information

Part Number	800103	800104	800105	800106
Rated up to (KW)	240	300	420	720
Overall Length (L1)	850mm	965mm	1125mm	1210mm
Unit Length (L2)	665mm	780mm	945mm	1030mm
Base Width (W1)	224mm / 8 ¾"	260mm / 10.25"	305mm / 12"	350mm / 14"
Unit Width (W2)	125mm / 5"	150mm / 6"	200mm / 8"	250mm / 10"
D1 (AAV Connection)	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP
D4 (Drain Connection)	3/4" BSP	3/4" BSP	3/4" BSP	3/4" BSP
D2, D3 (Connection to Boilers)	2 ½" BSP	2 ½" BSP	3" BSP	4" BSP
D5, D6 Connection to Heating System)	2 ½" BSP	2 ½" BSP	3" BSP	4" BSP
D3/D4 (X)	505mm	620mm	790mm	850mm
D5/D6 (Y)	445mm	560mm	720mm	780mm

Suitable for individual boilers or cascaded boilers up to the rated output of the header.
 All Low Loss Headers of 240kW (and above) have a mounting stand welded to the body of the unit.

*** Based on a 20c dT