STREBEL TS TANKS
1500 to 6000

Ref.: FP10 113-01
Date: 03/01/20

TS buffer tanks from **1500** to **6000** litres capacity, for closed heating or cooling circuits.
Thermally insulated with rigid, mould-injected, 80 mm-thick, PU polyurethane foam, with insulating piece in same material on the ND400 side manhole.

Supplied with side ND400 manhole to access inside the storage tank for inspection, cleaning and maintenance tasks.

Ready to be fitted with a 1 x backup electric immersion heater.

Up to 8 additional electric immersion heaters can be fitted using a special stainless steel plate which will be fitted to the ND400 manhole cover. IMPORTANT - This plate will need to be ordered as an additional item.

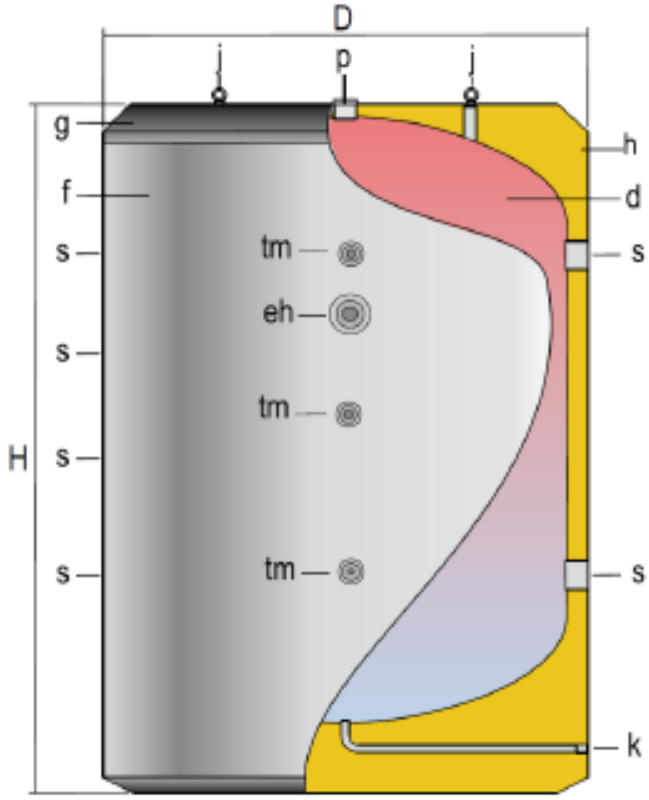

CARBON STEEL

GENERAL CHARACTERISTICS		TS 1500	TS 2000	TS 2500	TS 3000	TS 3500	TS 4000	TS 5000	TS 6000
Capacity	l.	1500	2000	2500	3000	3500	4000	5000	6000
D: external diameter	mm.	1360	1360	1660	1660	1660	1910	1910	1910
H: overall height	mm.	1830	2280	2015	2305	2580	2310	2710	3210
Diagonal	mm.	2281	2655	2611	2841	3068	2998	3316	3735
s: side connection	" GAS/F	4	4	4	4	4	4	4	4
eh: electric element connection	" GAS/F	2	2	2	2	2	2	2	2
p: upper connection	" GAS/F	2	2	2	2	2	2	2	2
k: drain connection	" GAS/M	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	2
tm: probe tube connection for sensors	" GAS/F	1/2	1/2	1/2	1/2	1/2	1/2	1/2	1/2
Empty weight (approx.) "I / IB"	Kg	273 / 298	353 / 378	503 / 528	540 / 565	576 / 601	893 / 918	970 / 995	1090
Side hole (only in IB model)		DN400	DN400	DN400	DN400	DN400	DN400	DN400	DN400